

**WORK DESCRIPTION** (please type or print legibly)

Describe the proposed project in detail, including all changes to the building, site, lot, or zoning. Include all features to be removed, altered, repaired, and/or added. Indicate all materials to be used and the manufacturer's specifications.

- Consult the Standards (C.C.: 3116.11 – 3116.14) and the applicable code for each Architectural Review Commission (C.C.: 3117 – 3119) at <http://columbus.gov/historicpreservation>.

- Is this application in response to an exterior Code Violation Order:  YES  NO

Remove non-historic fiber siding. Existing wood siding has severe dry rot at tongues which has caused rot and gaps, and has caused the siding to slip down and apart. As a result of this widespread dry rot, the siding is beyond reasonable repair.

It is proposed to install Boral "Rustic V" 1 x 6 siding. Remove and salvage door and window trim for re-installation after new siding installed. Install 3/4" Boral "jamb extension" on exterior of blind stop. Install 1 x 4 Boral flat, smooth corner boards - size to match

historic shadow line. Repair small section of rotted soffit with exterior plywood, thickness to match existing.

Colors: - Body to be Sherwin Williams Salty Dog SW 9177, trim to be Sherwin Williams Ibis White SW 7000.


**Required materials to submit with the application:**

**NOTE: Submit one (1) application and ten (10) collated, stapled copies of your submission packet. Drawings are required to be 11" x 17". Drawing specifications to be no less than 11 point font.**

- **Photos:** Current color photos printed on standard paper or photo paper. Include photos of each side of the building and/or site and detail views of the specific areas to be repaired or altered.
- Drawings:** For conceptual review, a basic site plan and elevations should be submitted. For new construction or graphics/signage, measured drawings of the sign and/or all elevations of the building are required.
- **Material Samples/Manufacturer's Brochures:** Material samples and brochures that illustrate and provide specifications for the proposed materials (i.e., paint chips, pavers, window/door specifications, etc).
- Site Plan:** A site plan must be included for new construction, additions, site graphics, demolition, lot splits, fencing, and major landscaping projects. The plan must show street location, north arrow, property lines, and all existing structures and/or landscape features in question.

**Owner/Applicant Signature**

I certify that I have read the Introduction to this application and that the information I have included, and all accompanying documentation, is complete and accurate to the best of my knowledge. I further certify that I, the applicant, have been authorized by the owner to commit to changes proposed by the commission.

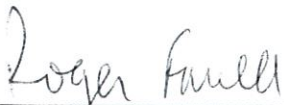

Signature of Owner or Applicant

6-18-2019

Date

6


## V-Rustic

The V-Rustic profile features a deep "V" groove that creates an appealing shadow line effect


Available Finish:



smooth

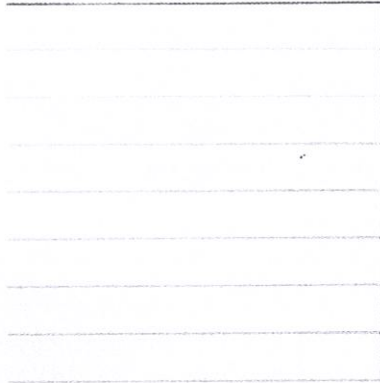

Nominal Size	Actual Thickness (A)	Actual Width (B)	Reveal (C)	Channel (D)	Tongue (E)
1 x 6	0.6875"	5.50"	5.0"	0.625"	0.50"
1 x 8	0.6875"	7.50"	7.0"	0.625"	0.50"
1 x 10	0.6875"	9.50"	9.0"	0.625"	0.50"




## Cove/Dutch Lap

The Cove/Dutch Lap profile features a subtle curve that creates a unique, eased appearance


Available Finish:



smooth

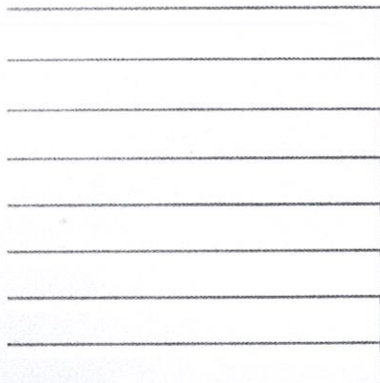

Nominal Size	Actual Thickness (A)	Actual Width (B)	Reveal (C)	Channel (D)	Tongue (E)
1 x 6	0.6875"	5.50"	4.969"	1.469"	0.531"
1 x 8	0.6875"	7.25"	6.719"	1.469"	0.531"
1 x 10	0.6875"	9.25"	8.719"	1.469"	0.531"




## Channel

The Channel profile's wide groove creates a rich shadow line effect

Available Finish:



smooth

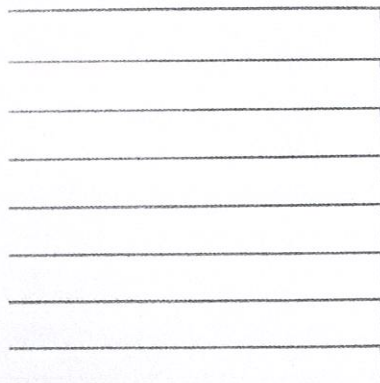

Nominal Size	Actual Thickness (A)	Actual Width (B)	Reveal (C)	Channel (D)	Tongue (E)
1 x 6	0.6875"	5.50"	4.969"	0.969"	0.531"
1 x 8	0.6875"	7.25"	6.719"	0.969"	0.531"
1 x 10	0.6875"	9.25"	9.719"	0.969"	0.531"

